

ProMelt Mat

ProMelt Mats hold the heating elements in place for a fast installation. Simply unroll the mat and secure to rewire or rebar using cable ties.



120 VAC Mats (38 Watts/ft²)

	Size (L x W)	Ft ²	Order#	Model#	Amps	Ohms
2' Wide	5' x 2'	10	81011665	SM3812000524	3.2	42-53
	10' x 2'	20	81011667	SM3812001024	6.3	20-25
	15' x 2'	30	81011669	SM3812001524	9.5	13-17
	20' x 2'	40	81011671	SM3812002024	12.7	7-10
	25' x 2'	50	81011673	SM3812002524	15.8	6-8
	30' x 2'	60	81011675	SM3812003024	19.0	4-6

240 VAC Mats (38 Watts/ft²)

	Size (L x W)	Ft ²	Order#	Model#	Amps	Ohms
2' Wide	10' x 2'	20	81014652	SM3824001024	3.2	65-81
	20' x 2'	40	81014653	SM3824002024	6.3	31-39
	30' x 2'	60	81014654	SM3824003024	9.5	20-26
	40' x 2'	80	81014655	SM3824004024	12.7	14-19
	50' x 2'	100	81014656	SM3824005024	15.8	11-15
	60' x 2'	120	81014657	SM3824006024	19.0	9-13

208 VAC Mats (50 Watts/ft²)

	Size (L x W)	Ft ²	Order#	Model#	Amps	Ohms
2' Wide	7' x 2'	14	81011593	SM5020800724	3.4	59-74
	11' x 2'	22	81011594	SM5020801124	5.3	40-50
	14' x 2'	28	81011595	SM5020801424	6.7	28-35
	18' x 2'	36	81011596	SM5020801824	8.7	23-29
	20' x 2'	40	81011597	SM5020802024	9.6	17-22
	24' x 2'	48	81011598	SM5020802424	11.5	15-20
	28' x 2'	56	81011599	SM5020802824	13.5	13-17
	34' x 2'	68	81011601	SM5020803424	16.3	10-13
	38' x 2'	76	81011602	SM5020803824	18.3	9-12
	42' x 2'	84	81011603	SM5020804224	20.2	8-11
	48' x 2'	96	81011604	SM5020804824	23.1	7-10

	Size (L x W)	Ft ²	Order#	Model#	Amps	Ohms
3' Wide	10' x 3'	30	81011607	SM5020801036	7.2	30-38
	15' x 3'	45	81011610	SM5020801536	10.8	14-19
	20' x 3'	60	81011612	SM5020802036	14.4	11-15
	25' x 3'	75	81011614	SM5020802536	18.0	9-12
	30' x 3'	90	81011616	SM5020803036	21.6	7-9

240 VAC Mats (50 Watts/ft²)

	Size (L x W)	Ft ²	Order#	Model#	Amps	Ohms
2' Wide	8' x 2'	16	81011617	SM5024000824	3.3	68-84
	12' x 2'	24	81011618	SM5024001224	5.0	43-54
	16' x 2'	32	81011619	SM5024001624	6.7	32-40
	20' x 2'	40	81011620	SM5024002024	8.3	26-32
	24' x 2'	48	81011621	SM5024002424	10.0	21-27
	28' x 2'	56	81011622	SM5024002824	11.7	18-23
	32' x 2'	64	81011623	SM5024003224	13.3	15-19
	36' x 2'	72	81011624	SM5024003624	15.0	13-17
	40' x 2'	80	81011625	SM5024004024	16.7	12-15
	44' x 2'	88	81011626	SM5024004424	18.3	11-14
	48' x 2'	96	81011627	SM5024004824	20.0	10-13
52' x 2'	104	81011628	SM5024005224	21.7	8-11	

	Size (L x W)	Ft ²	Order#	Model#	Amps	Ohms
3' Wide	10' x 3'	30	81011631	SM5024001036	6.3	30-38
	15' x 3'	45	81011633	SM5024001536	9.4	20-25
	20' x 3'	60	81011635	SM5024002036	12.5	14-18
	25' x 3'	75	81011637	SM5024002536	15.6	11-15
	30' x 3'	90	81011639	SM5024003036	18.8	9-12
35' x 3'	105	81011640	SM5024003536	21.9	8-11	

ProMelt[®] Electric Snow Melting Mats & Cables



ProMelt Cable

ProMelt Cable offers a flexible option for curves and free-form areas. Cable is secured to rebar or rewire at 3 or 4" spacing with cable ties.



120 VAC Cables

Coverage (ft ²)						
3" O.C. (50 W/ft ²)	4" O.C. (38 W/ft ²)	Length	Order#	Model#	Amps	Ohms
8	10	29'	81011367	SC50120008	3.3	31-39
15	20	59'	81011369	SC50120015	6.3	15-19
20	26	78'	81011370	SC50120020	8.3	13-17
30	39	118'	81011373	SC50120030	12.5	7-9
40	53	158'	81011376	SC50120040	16.7	5-7
53	69	208'	81011378	SC50120053	22.1	4-6

208 VAC Cables

Coverage (ft ²)						
3" O.C. (50 W/ft ²)	4" O.C. (38 W/ft ²)	Length	Order#	Model#	Amps	Ohms
14	19	55'	81011408	SC50208014	3.4	60-74
20	26	78'	81011416	SC50208020	4.8	36-46
30	39	118'	81011417	SC50208030	7.2	30-38
35	46	138'	81011418	SC50208035	8.4	23-29
40	53	158'	81011383	SC50208040	9.6	18-23
55	72	218'	81011385	SC50208055	13.2	13-17
60	79	238'	81011386	SC50208060	14.4	11-15
65	85	257'	81011387	SC50208065	15.6	10-13
75	98	297'	81011388	SC50208075	18.0	9-12
80	105	317'	81011389	SC50208080	19.2	8-11
90	118	357'	81011390	SC50208090	21.6	7-9

240 VAC Cables

Coverage (ft ²)						
3" O.C. (50 W/ft ²)	4" O.C. (38 W/ft ²)	Length	Order#	Model#	Amps	Ohms
15	20	59'	81011391	SC50240015	3.1	64-79
25	33	98'	81011392	SC50240025	5.2	46-57
30	39	118'	81011393	SC50240030	6.3	30-38
40	53	158'	81011394	SC50240040	8.3	26-33
45	59	178'	81011395	SC50240045	9.4	20-25
55	72	218'	81011396	SC50240055	11.5	18-23
60	79	238'	81011397	SC50240060	12.5	14-18
65	85	257'	81011398	SC50240065	13.5	12-16
75	98	297'	81011399	SC50240075	15.6	11-15
80	105	317'	81011400	SC50240080	16.7	10-13
90	118	357'	81011401	SC50240090	18.8	9-12
105	137	417'	81011402	SC50240105	21.9	8-11

Available at: **888-470-2757**

PEXHEAT.COM

SunTouch[®]



A WATTS Brand

ProMelt[®] snow melting systems offer safe access, and patio heating for extending the season



Why Choose SunTouch[®] for electric snow melting?

- Free design assistance and support
- Products engineered for simple installation
- Snow melting mats and cables are backed by a 10-year warranty

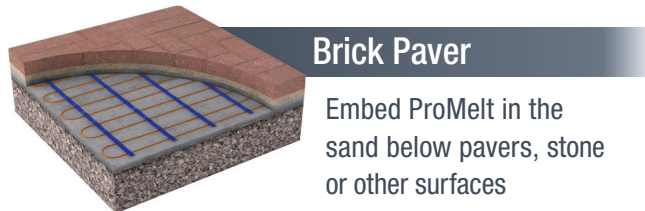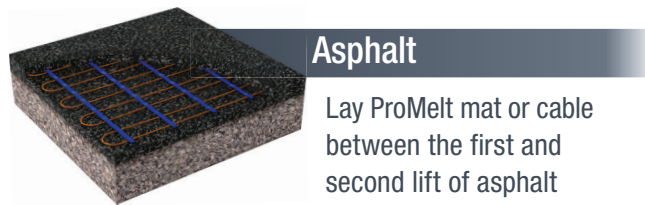

Improve safety

- Reduce the chance of injury with ice free ramps, entrances and parking lots
- Improve safety for pedestrians and vehicles on your property
- Eliminate physical strains from snow shoveling

Save time and money

- Eliminate time spent shoveling walkways, driveways and loading ramps
- Save on contracted clearing and salt or melting chemical costs

Prevent damage

- Save concrete, floor coverings, landscaping and auto paint from the effects of salt
- Prevent snow plow damage to concrete, pavers, curbs or landscaping
- Reduce “tracked-in” snow and water

ProMelt mat

- Fastest installation option for rectangular shaped areas
- Unroll and secure to rewire or rebar using cable ties
- 38 or 50 Watt/ft² mats



ProMelt cable

- Flexible choice for curves, stairs and free-form shapes
- Space at 3” or 4” depending on heat loss calculations
- Attach to existing slab with CableStrap[™]



ProMelt controls

- Options for fully automatic operation or automatic start with timed melting
- Built-in features to lower operational cost

