tekmar® Submittal 24 V (ac) Transformer 009








Accessories

ies Replaces: 11/12

Job _____ Designer Brian Whitehurst Contact Pexheat.com

The Transformer 009 is a 40 VA, 24 V (ac) transformer for use with products that require an external transformer. There is an in-line fuse that comes with the transformer for circuit protection.

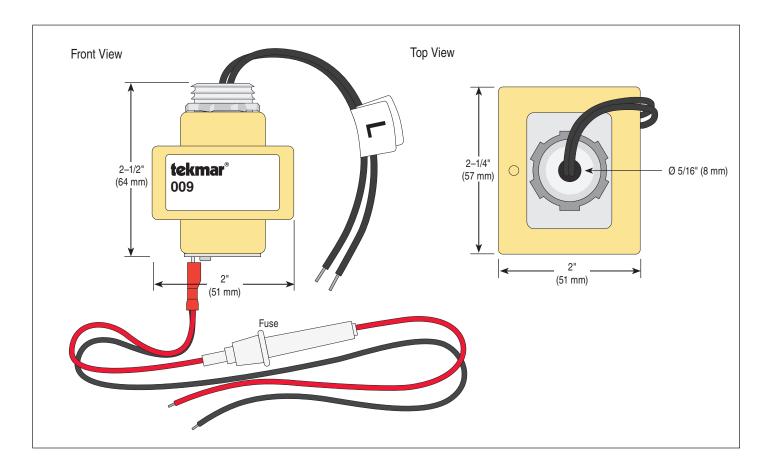

Specifications

| 24 V (ac) Transformer 009 40 VA | |
|---------------------------------|--|
| Literature | 009_D |
| Packaged weight | 1.6 lb (750 g) |
| Dimensions | 2" W x 2-1/4" L x 2-1/2" D (51 x 57 x 64 mm) |
| Approvals | CSA standard C22.2 #66 part B & UL 5085 |
| Ambient conditions | Indoor use only, 32 to 104°F (0 to 40°C) |
| Input power supply | 120 V (ac) ± 10%, 60 Hz |
| Output power available | 24 V (ac) ± 10% 60 Hz, 1.67A, 40 VA, Class 2 |
| Supplied fuse rating | T2 A 250 V slow-blow |
| Warranty | Limited 3 Year (See 009_D for full warranty) |

Features -

- 24 V (ac), 40 VA transformer
- · Color coded wiring for easy in-phase wiring
- · Replaceable in-line fuse included

SPECIAL REQUIREMENTS

N/A



tekmar Control Systems Ltd., A Watts Water Technologies Company. Head Office: 5100 Silver Star Road, Vernon, B.C. Canada V1B 3K4, 250-545-7749, Fax. 250-545-0650 Web Site: www.tekmarControls.com