

H-x367 Pro-Pal E-Tank Service Assembly

H-x367 Series

Pro-Pal E-Tank Service Assembly

Forged Brass Mounting Arm w/ Full Port Isolation Valves
Expansion Tank Port & Hi-Flow Hose Drain
Includes Automatic Air Vent & Pressure Gauge
For Hydronic Applications







	Size (in)	Item#	Max Temp	Pressure Rating	Weight (lbs)	Carton Qty	Case Qty
FIP	1/2"	H-43672	200°F Max	200 PSI CWP Max	4.96	1	6

Specifications: Suitable for use with expansion tanks up to 8 gallons in size. Designed for use with water, oil, glycol mix in residential or commercial heating systems. This valve is actuated by a blowout proof stem. Features a double o-ring stem seal design. Threaded (NPT) ends comply with ANSI B1.20.1.



	Size (in)	Item#	B	C	D	E	F	G	H	I
FIP	1/2"	H-43672	2.38	12.88	9.98	2.48	3.25	3.35	3.94	2.36

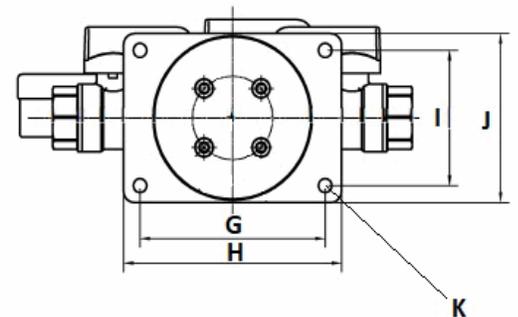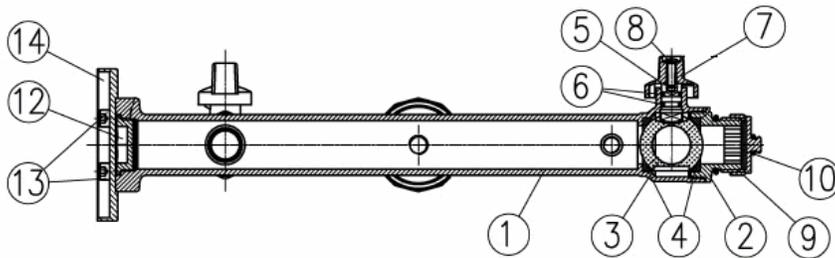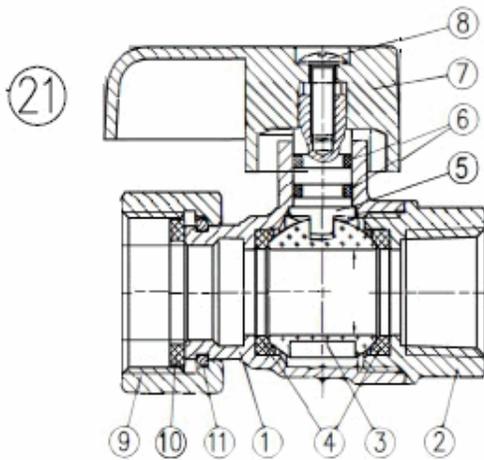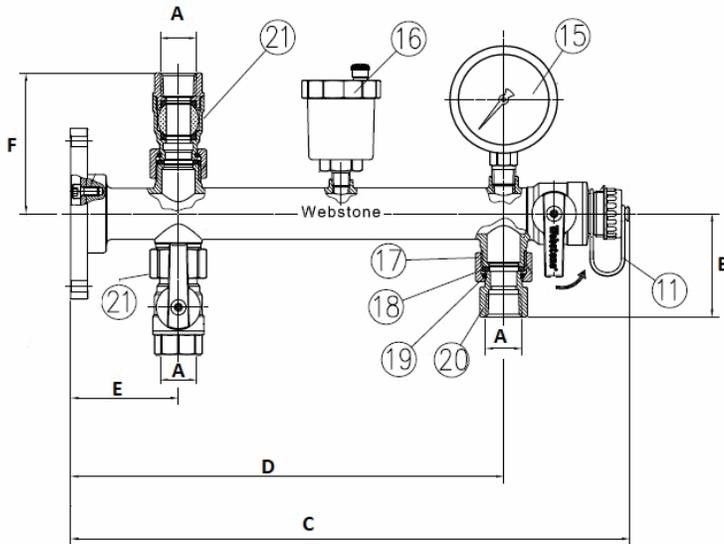

NO.	DESCRIPTION	MATERIAL
1.00	Body	Brass
2.00	Cap	Brass
3.00	Ball	Brass HCP
4.00	Seat	PTFE
5.00	Stem	Brass
6.00	O-Ring	EPDM
7.00	Handle	Aluminum
8.00	Screw	Stainless Steel
9.00	Hose Cap	Brass
10.00	Hose gasket	EPDM
11.00	Strap	TPE
12.00	Mounting Cap	Brass
13.00	Screw	Stainless Steel
14.00	Mounting Base	Iron
15.00	Pressure Gauge	Various
16.00	Air Vent	Various
17.00	Union Nut	Brass
18.00	Gasket	EPDM
19.00	Lock Ring	Stainless Steel
20.00	Tank Fitting	Brass
21.00	Union Ball Valve	See inset
21.01	Body	Brass
21.02	Cap	Brass
21.03	Ball	Brass HCP
21.04	Seat	PTFE
21.05	Stem	Brass
21.06	O Ring	EPDM
21.07	Handle	Aluminum
21.08	Screw	Stainless Steel
21.09	Union Nut	Brass
21.10	Gasket	EPDM
21.11	Lock Ring	Stainless Steel

